




Elecció dels plugins a implementar

Description

-Contact Form 7

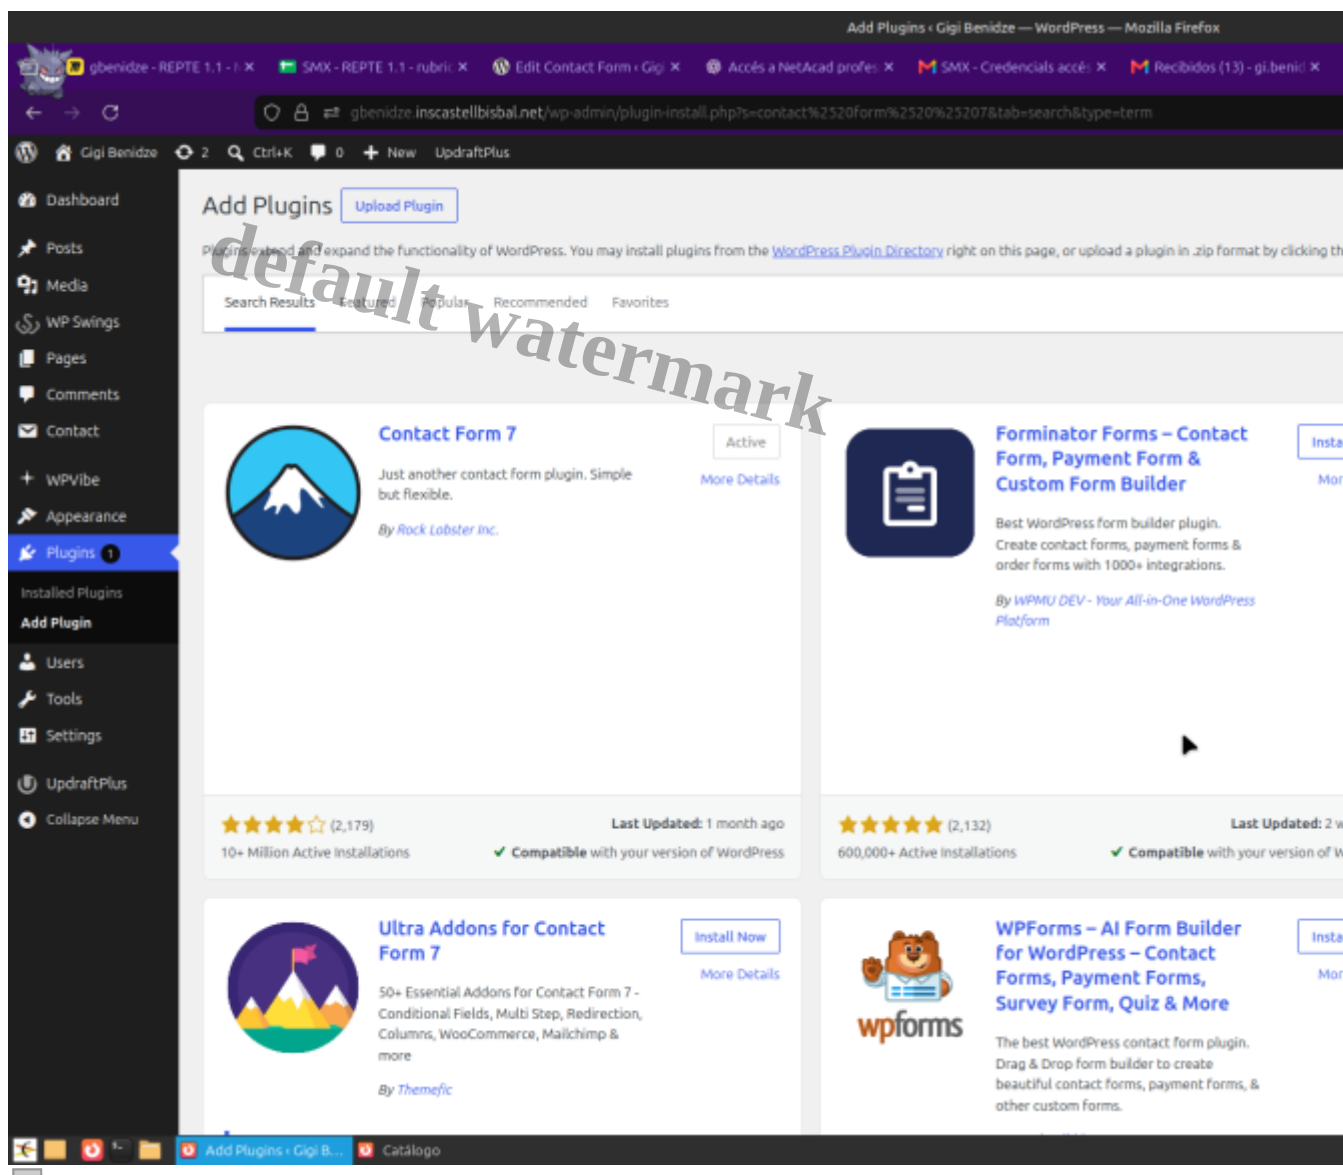

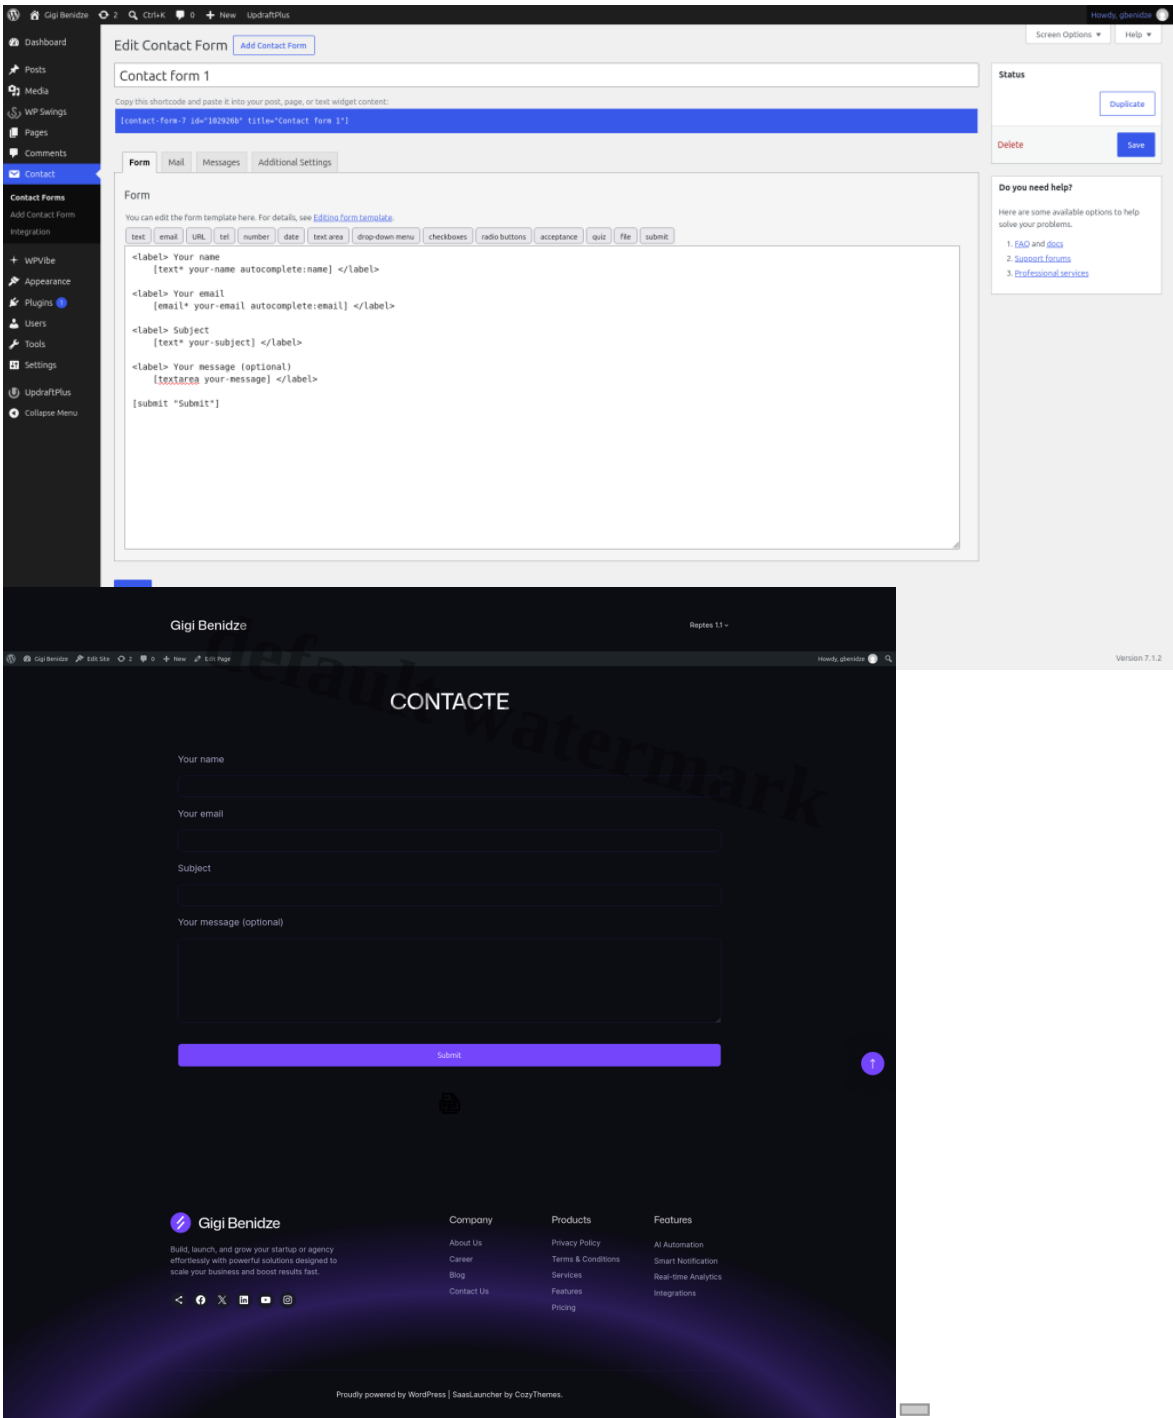


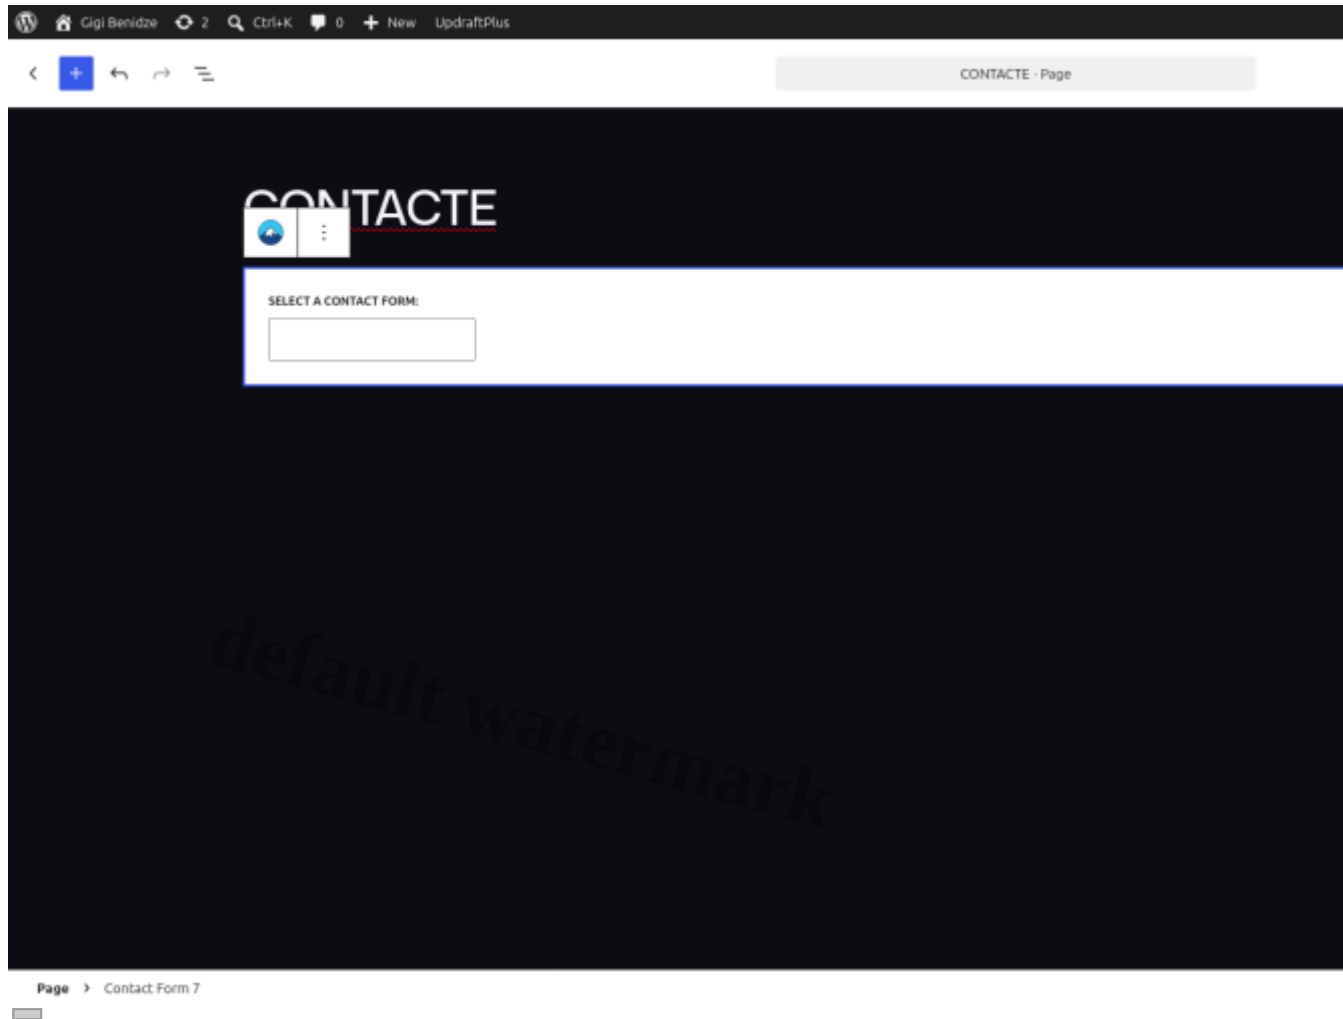

He escollit **Contact Form 7** perquè la meua web necessita un formulari de contacte perquè els usuaris puguin enviar missatges. És un plugin útil perquè permet afegir un formulari de manera fàcil i sense haver de programar-lo des de zero.

He instal·lat i activat el plugin **Contact Form 7**. Després he creat un formulari amb camps com el nom, el correu electrònic, l'assumpte i el missatge. Finalment, he creat una pàgina de contacte i hi he afegit el formulari. He comprovat que el formulari es mostra correctament a la web.

-UpdraftPlus

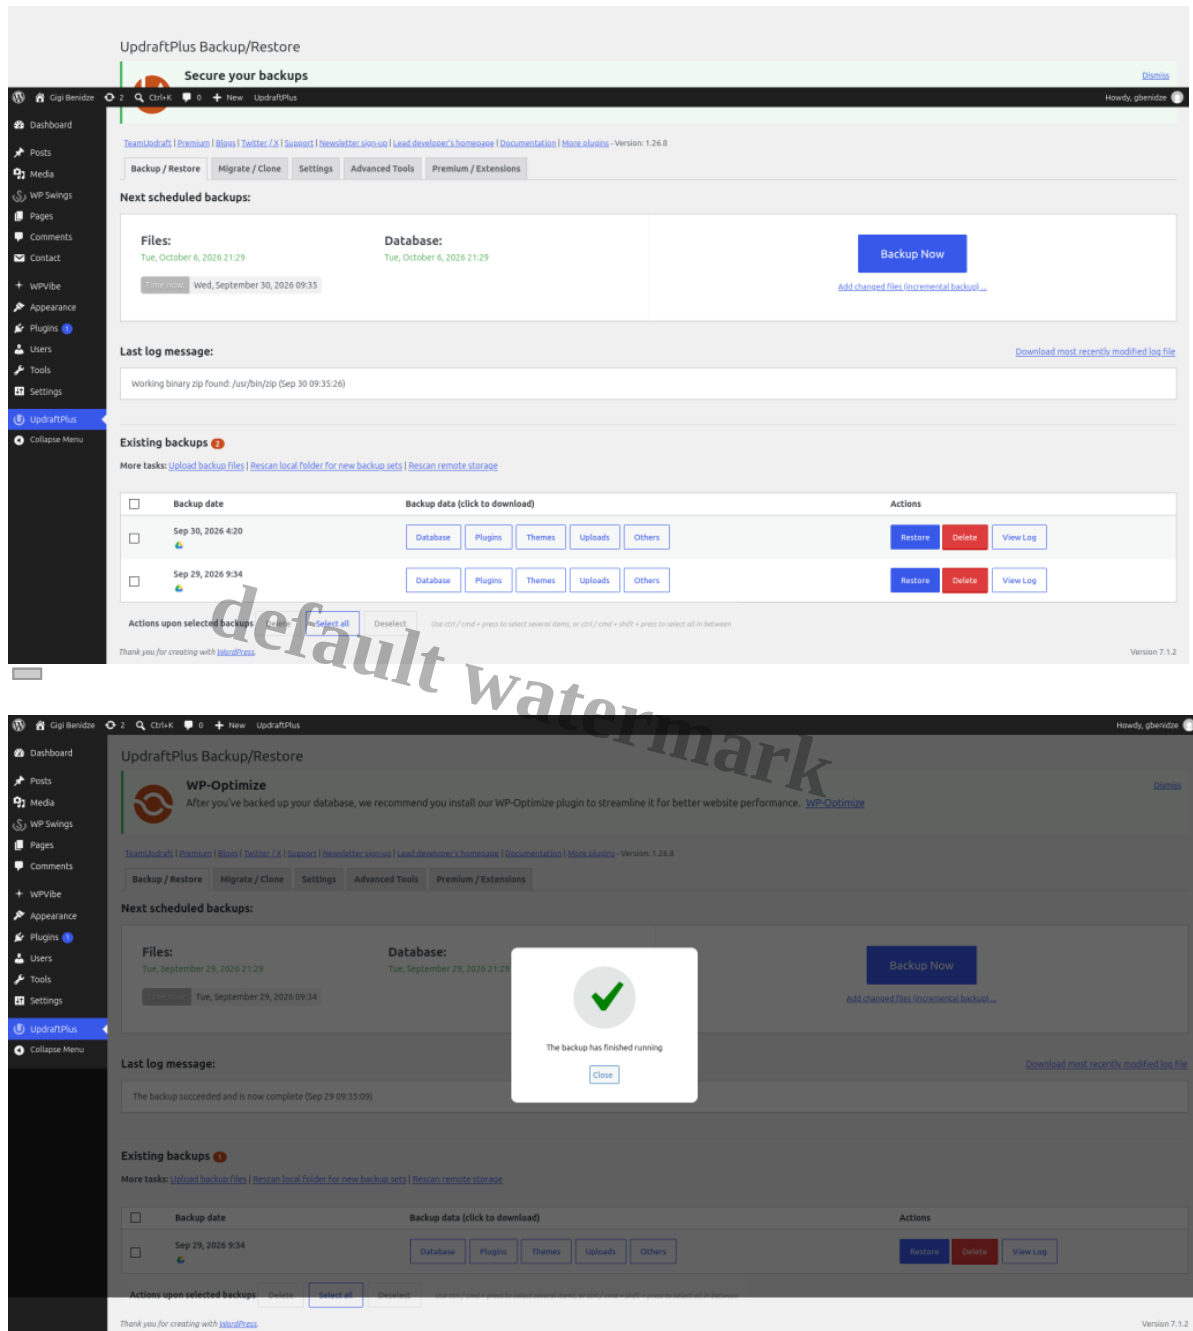

He instal·lat i activat el plugin UpdraftPlus i l'he configurat perquè les còpies de seguretat es guardin a Google Drive. He fet una còpia de seguretat del WordPress i he comprovat que s'ha creat correctament.

He documentat la configuració d'UpdraftPlus i la còpia de seguretat guardada a Google Drive mitjançant captures de pantalla.

-LiteSpeed Cache

Dashboard

Posts

Media

WP Settings

Pages

Comments

Contact

WPVibe

Appearance

Plugins

Users

Tools

Settings

UploadPlan

LiteSpeed Cache

Dashboard

Privacy

General

Cache

CDN

Image Optimization

Page Optimization

Database

Crawler

Toolbox

Collapsible Menu

Options saved

[1] Cache

[2] TTL

[3] Purge

[4] Excludes

[5] ESI

[6] Object

[7] Browser

[8] Advanced

WARNING

LiteSpeed caching functions on this page are currently unavailable

To use the caching functions you must have a LiteSpeed web server or be using QUIC cloud CDN [Learn More](#)

Cache Control Settings

Enable Cache

OFFON

Please visit the [FAQ page](#) on how to test the cache.

NOTE: When disabling the cache, all cached entries for this site will be purged.

Cache Logged-in Users

OFFON

Preload cache frontend pages for logged-in users. (3045 v5.2.1+ required)

Cache Comments

OFFON

Preload cache comments that have pending comments. Disabling this option will serve non-cacheable pages to comments. (3045 v5.2.1+ required)

Cache REST API

OFFON

Cache requests made by WordPress REST API calls.

Cache Login Page

OFFON

Disabling this option may negatively affect performance.

Cache Mobile

OFFON

Use a separate cache copy for mobile visitors. [Learn More about when this is needed](#)

This setting will add the `Accept-Range: bytes` header.

This setting will regenerate crawler list and clear the database!

List of Mobile User Agents

Mobile

Android

Silk

Kindle

BlackBerry

Opera Mini

Opera Mobi

Default value

Mobile

Android

Silk

Kindle

BlackBerry

Opera Mini

Opera Mobi

Clear per Site

Private Cached URIs

Paths containing these strings will NOT be cached as public. The URIs will be compared to the REQUEST_URI server variable. For example, for `/page1/page2.html`, `page2.html` can be used here.

To match the beginning, use `/` in the beginning of the item. To do an exact match, use `/` in the end of the URI. One per line.

Force Cache URIs

Paths containing these strings will be cached regardless of non-cacheable settings. The URIs will be compared to the REQUEST_URI server variable. For example, for `/page1/page2.html`, `page2.html` can be used here.

To match the beginning, use `/` in the beginning of the item. To do an exact match, use `/` in the end of the URI. One per line.

To define a custom TTL for a URI, add a space followed by the TTL value to the end of the item. For example, `/page1/page2.html 300` defines a TTL of 300 seconds for `/page1/page2.html`. One per line.

Force Public Cache URIs

Paths containing these strings will be forced to public cached regardless of non-cacheable settings. The URIs will be compared to the REQUEST_URI server variable. For example, for `/page1/page2.html`, `page2.html` can be used here.

To match the beginning, use `/` in the beginning of the item. To do an exact match, use `/` in the end of the URI. One per line.

To define a custom TTL for a URI, add a space followed by the TTL value to the end of the item. For example, `/page1/page2.html 300` defines a TTL of 300 seconds for `/page1/page2.html`. One per line.

Drop Query String

fbclid

gclid

uclid

_ga

Ignore certain query strings when caching. (3045 v5.2.1+ required) For example, to drop parameters beginning with `fbclid`, `gclid`, `uclid`, `_ga` can be used here. [Learn More](#)

Clear per Site

This setting will add the `Accept-Range: bytes` header.

Save Changes

[View LiteSpeed Cache](#) [★★★★★](#) [on WordPress.org](#) | [Read LiteSpeed Documentation](#) | [View LiteSpeed support forum](#) | [Join LiteSpeed Slack community](#)


Version 7.1.2

COMPANY NAME

Address | Phone | Link | Email

Page 5

Footer Tagline

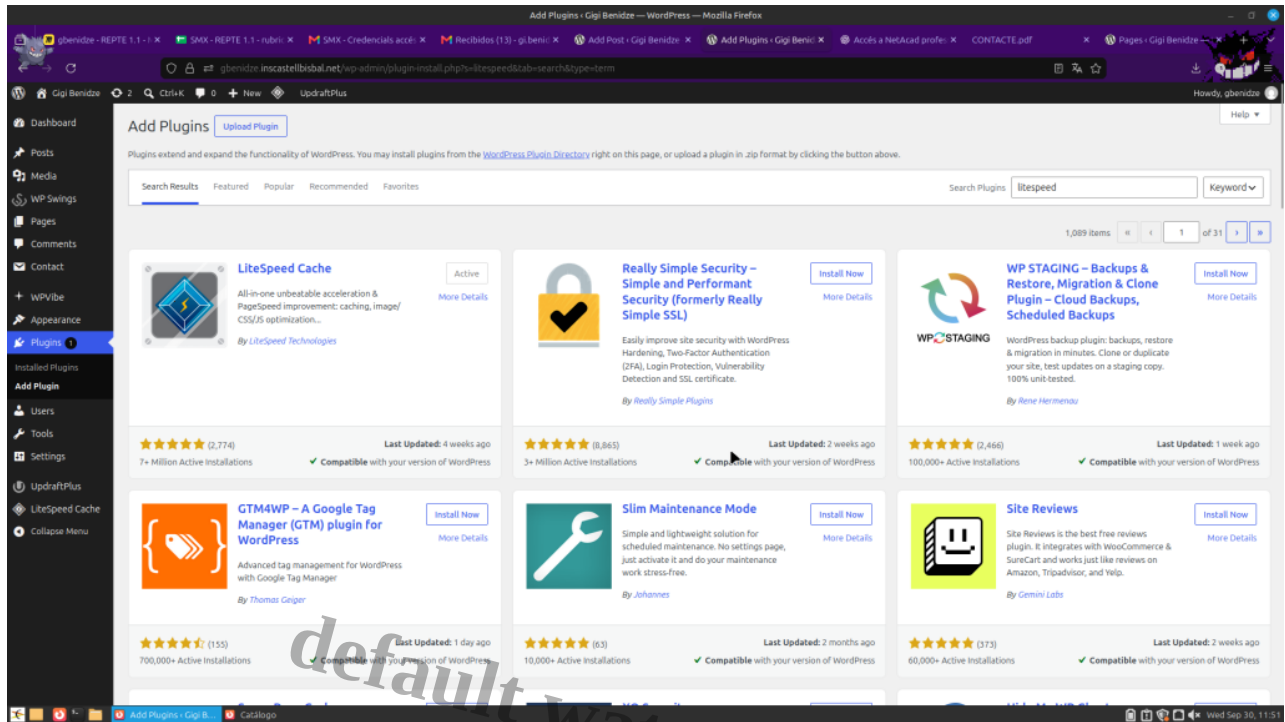

He escollit LiteSpeed Cache perquè és important que la pàgina web carregui ràpidament i funcioni correctament. Aquest plugin ajuda a millorar el rendiment de la web i a reduir el temps de càrrega.

He instal·lat i activat el plugin LiteSpeed Cache des del panell de WordPress. Després he revisat la seva configuració i he activat les opcions de memòria cau disponibles. Finalment, he comprovat que la pàgina web continua funcionant correctament.

Category

1. Llibre d'estil
2. reptes 1.1

Date Created

September 30, 2026

Author

gbenidze